

FIG.1

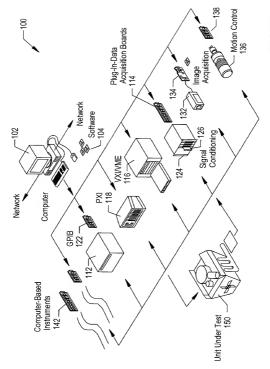


FIG. 2A

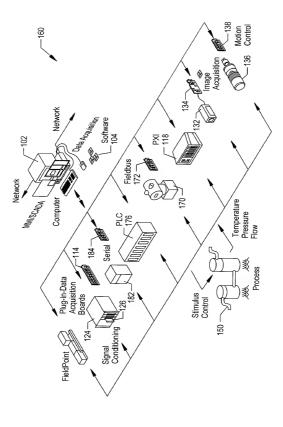


FIG. 2B

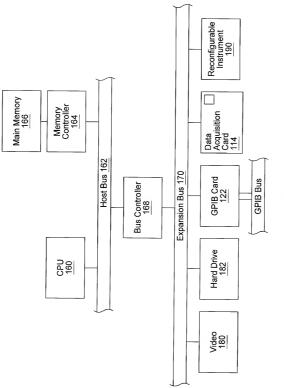


FIG. 3

Developer creates a graphical program generation (GPG) program, wherein the GPG program is operable to generate a plurality of graphical programs, based on received information 200




FIG. 4




FIG. 6

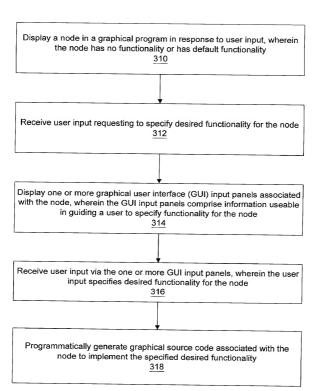


FIG. 7

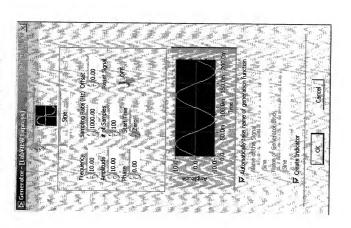


FIG. 8




FIG. 9



FIG. 10

正式 FIG. 12




FIG. 11




FIG. 13




FIG. 14





FIG. 15






FIG. 17




FIG. 18

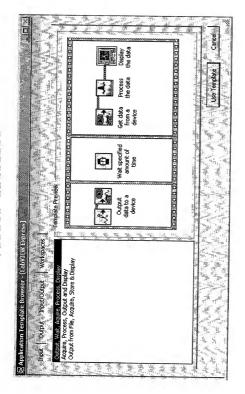


FIG. 19

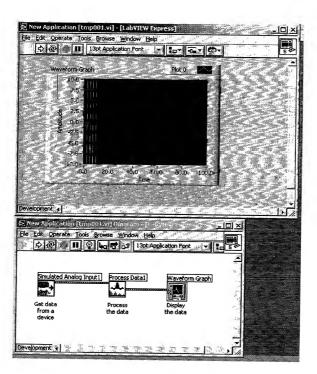


FIG. 20


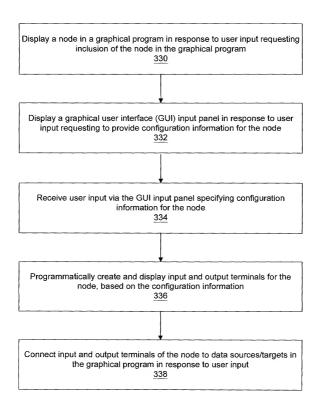


FIG. 21






FIG. 23 (PRIOR ART)




FIG. 24




FIG. 25






FIG. 27




FIG. 28



FIG. 29




FIG. 30




FIG. 31




FIG. 32

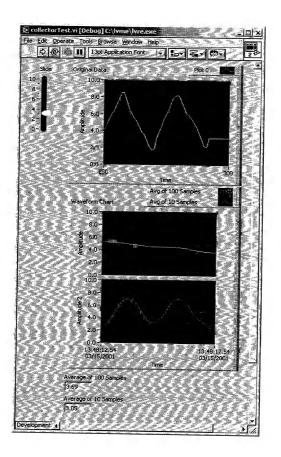


FIG. 33

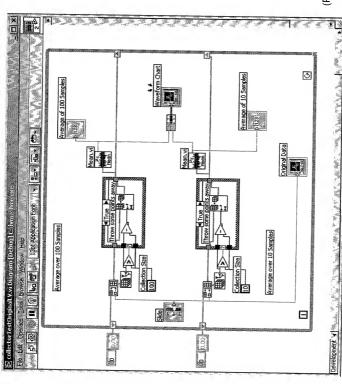


FIG. 34 (PRIOR ART)